

# BARRIQUE

---

GAMBINI GROUP

industrie ceramiche



OUR CATALOGUES

**Spessore 9 mm**  
Thickness 9 mm  
Épaisseur 9 mm  
Stärke 9 mm



SELECTED CHERRY



SELECTED HONEY



SELECTED ALMOND



NATURAL CHERRY



NATURAL HONEY



NATURAL ALMOND



30x120 . 12"x48"  
RETTIFICATO



20x120 . 8"x48"  
RETTIFICATO



10x60 . 4"x24"  
LOSANGA DX  
only NATURAL



10x60 . 4"x24"  
LOSANGA SX  
only NATURAL



20x120 . 8"x48"  
EXT. RETTIFICATO  
ONLY NATURAL HONEY

NATURAL



BARRIQUE NATURAL HONEY LOSANGA

HOME Style

Barrique

SELECTED



BARRIQUE SELECTED HONEY



SELECTED

BARRIQUE SELECTED ALMOND



NATURAL

BARRIQUE NATURAL ALMOND

NATURAL



BARRIQUE NATURAL CHERRY  
OCEAN BLACK ABYSS

HOME Style

Barrique

SELECTED



BARRIQUE SELECTED CHERRY

# Barrique

## COLORI

Colors . Couleurs . Farben



SELECTED CHERRY



SELECTED HONEY



SELECTED ALMOND




NATURAL CHERRY



NATURAL HONEY



NATURAL ALMOND

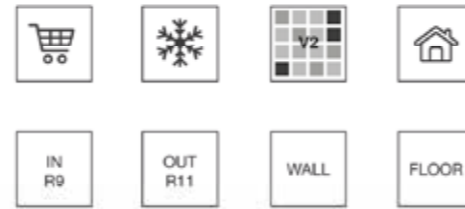

## FORMATI

Sizes . Formats . Formate



30x120 . 12"x48"  
RETTIFICATO  
Spessore 9 mm



20x120 . 8"x48"  
EXT. RETTIFICATO  
ONLY NATURAL HONEY



10x60 . 4"x24"  
LOSANGA DX  
only NATURAL



10x60 . 4"x24"  
LOSANGA SX  
only NATURAL

# HOME Style

# Barrique

## IMBALLI

Packaging . Emballages . Verpackungen



	PCS   BOX	M²   BOX	KG   BOX	BOX   PALLET	M²   PALLET	KG   PALLET
20x120 . 8"x48" Ret.	9	6	1,44	28,00	24	34,56
30x120 . 12"x48" Ret.	9	4	1,44	28,00	36	51,84
LOSANGA 10x60 . 4"x24"	9	16	0,80	15,00	40	32,00
BATTISCOPA 7x60 . 2 <sup>7/8</sup> "x24" Ret.	9	20	12 ml	19,00	-	-
GRADONE 30x120 . 12"x48"	9	2	-	-	-	-
ANG. GRAD. 30x30 12"x12"	9	2	-	-	-	-

## CONSIGLI PER LA POSA

Suggestion for laying . Conseil pour la pose . Verlegetipps

Per i formati rettangolari, si consiglia una sfalsatura tra ciascuna piastrella non superiore a 6-10 cm  
Fuga consigliata: minimo 3 mm per prodotti non rettificati . minimo 2 mm per prodotti rettificati.

When laying, you are recommended not to stagger the rectangular tiles by more than 6-10 cm (2"-4")  
Suggested joint: 3 mm minimum for non-rectified products . 2 mm minimum for rectified products.

Pose conseillée avec un décalage entre chaque listel non supérieur à environ 6-10 cm  
Joint conseillée: 3 mm minimum pour produits non rectifiés . 2 mm minimum pour produits rectif

Wir empfehlen eine Verlegung mit einer Verschiebung zwischen den einzelnen Leisten von nicht mehr als ungefähr 6-10 cm  
Empfohlene Fuge: mindestens 3 mm für nicht rechtwinklig geschliffene Produkte . mindestens 2 mm für rechtwinklig geschliffene Produkte.

## PEZZI SPECIALI

Special trims . Pièces spéciales . Formteile



7x60 . 2<sup>7/8</sup>"x24"  
BATTISCOPA RETTIFICATO



GRADONE COSTA RETTA  
(30 <-> 60)x120 . (12" <-> 24")x48"  
LARGHEZZA: misura variabile  
a richiesta da 30 a 60 cm



ANG. GRADONE COSTA RETTA  
(30 <-> 60)x30 . (12" <-> 24")x12"  
LARGHEZZA: misura variabile  
a richiesta da 30 a 60 cm

